

P520 Safety Pattern Pressure Gauge



Bourdon Tube Pressure Gauge



Application:

- For aggressive media and environment

Special Features

- All stainless steel design

Technical Data

Diameter: 63, 100 mm

Case/Bezel: Stainless-steel with bayonet ring and solid baffle wall (solidfront) and blow-out back

Ranges:

63 mm: 0...1 to 0...1000 bar

100 mm 0...0,6 bar to 0...1000 bar

Accuracy: 1,6%, 1%

Wetted Parts: Stainless steel AISI 316L

Pressure connection:

Material: Stainless steel AISI 316

G1/8, G1/4, G1/2, or NPT, BSPT, etc.,
LM, LBM

Dial: White aluminium with black lettering

Pointer: Black aluminium

Window: Polycarbonate

Options:

Liquid filling

3-hole panel or surface mounting flange

Safety glass

Alarm contacts

Order information

Model/Size/Scale range/Size of connection/Options

PA Instruments, s.r.o

Vazska 1, 911 05 Trenčín

Tel: +421-32 652 42 10


<http://www.pai.sk> E-mail: sales@pai.sk

P520 Safety Pattern Pressure Gauge



Bourdon Tube Pressure Gauge

Dimensions							
Dial Sizes	Mounting	Unit	A	D	E	F	M
2-1/2" (63mm)	LM	inches	2.5	1.54	2.20	0.68	—
	LM	mm	63.5	39.1	55.9	17.3	—
	LBM	inches	2.5	1.54	2.56	0.66	1.39
	LBM	mm	63.5	39.1	65.0	16.8	35.3
4" (100mm)	LM	inches	3.99	2.32	3.27	1.0	—
	LM	mm	101.4	58.9	83.0	25.4	—
	LBM	inches	3.99	2.32	3.68	1.14	1.89
	LBM	mm	101.4	58.9	93.5	29.0	48.0

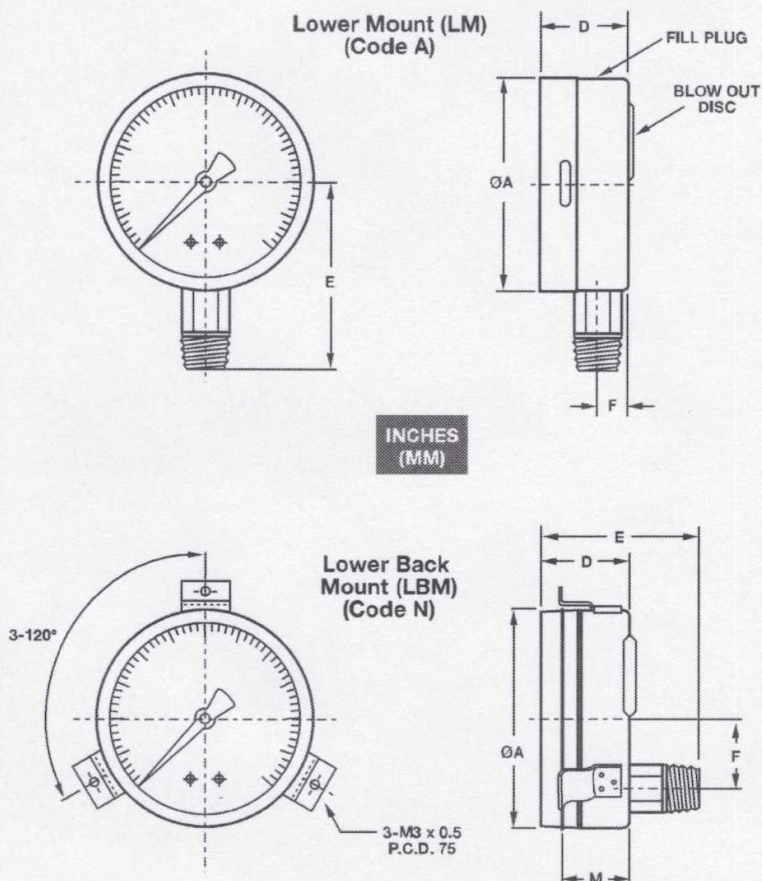

PA Instruments, s.r.o
Vazska 1, 911 05 Trenčín

Tel: +421-32 652 42 10

<http://www.pai.sk> E-mail: sales@pai.sk